



Twist<sup>®</sup>

TWIST  
AV STAND  
*product set up instructions*



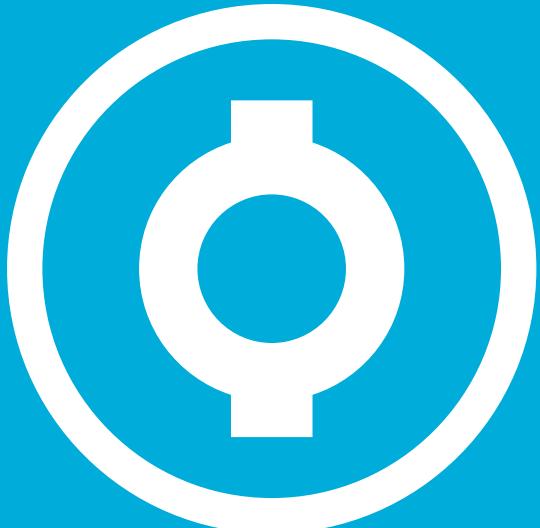


## Twist AV Stand Setup Instructions

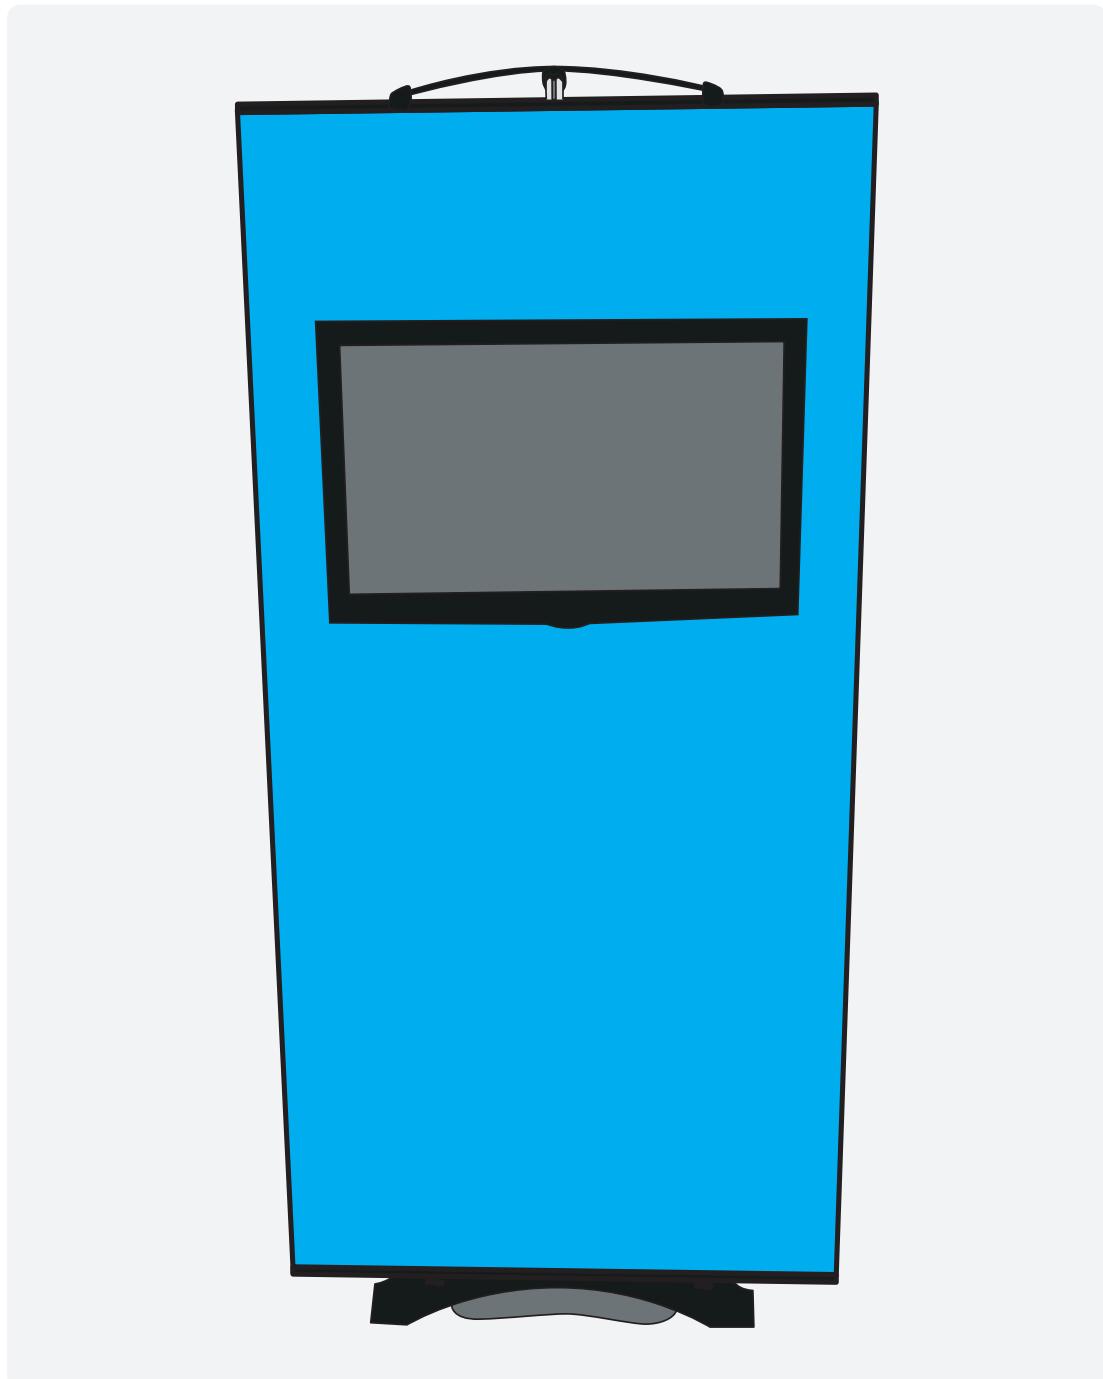


## Twist AV Stand Setup Instructions

1

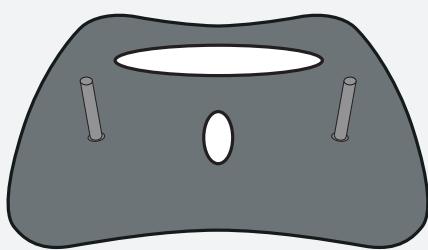


Place the AV base on the floor.

2

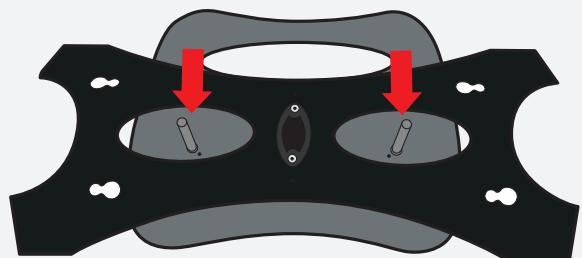



Place a TWIST base over the AV base locating uprights and manoeuvre the TWIST base socket into position.

3


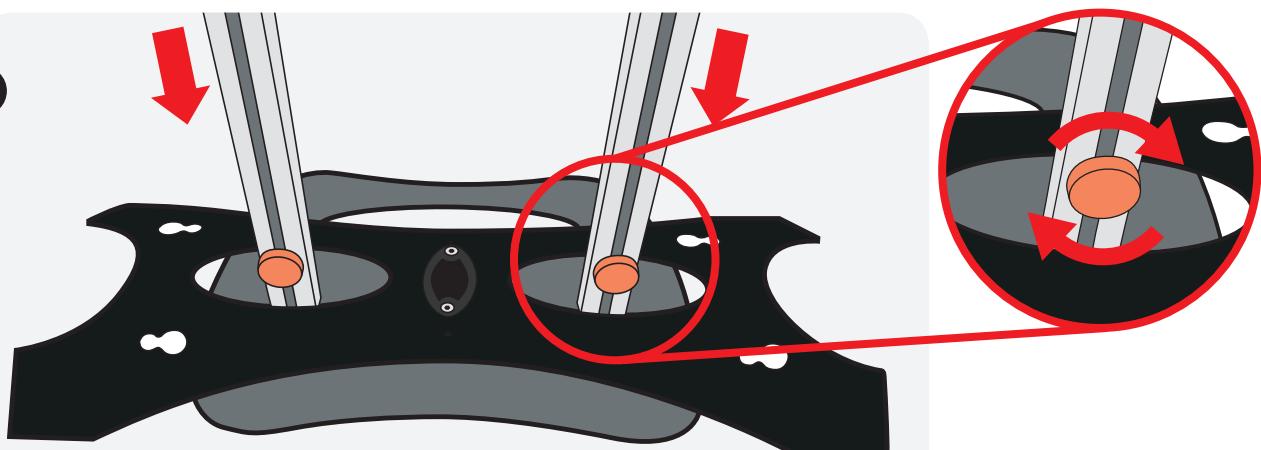


Slide the bottom AV uprigths (orange fixing) on to the AV base, and tighten the orange screws.

## Twist AV Stand Setup Instructions

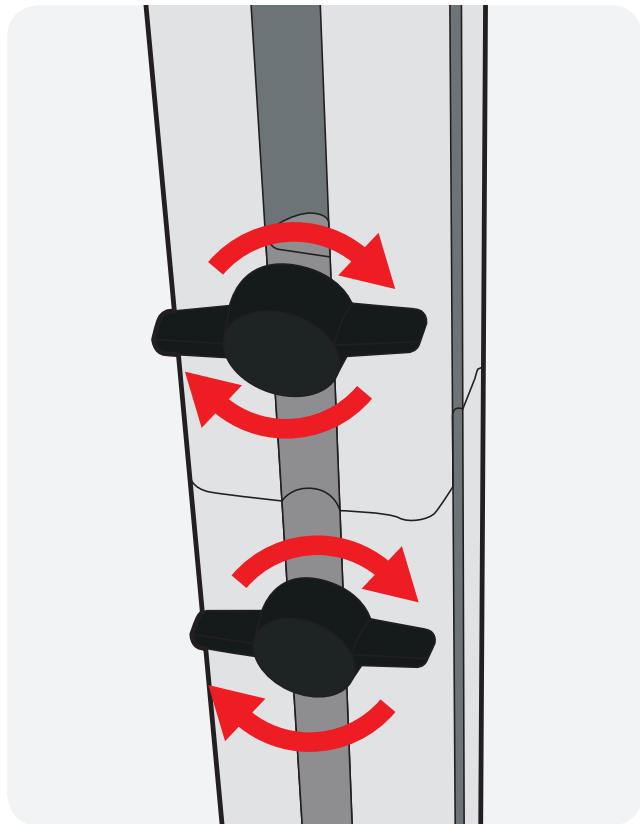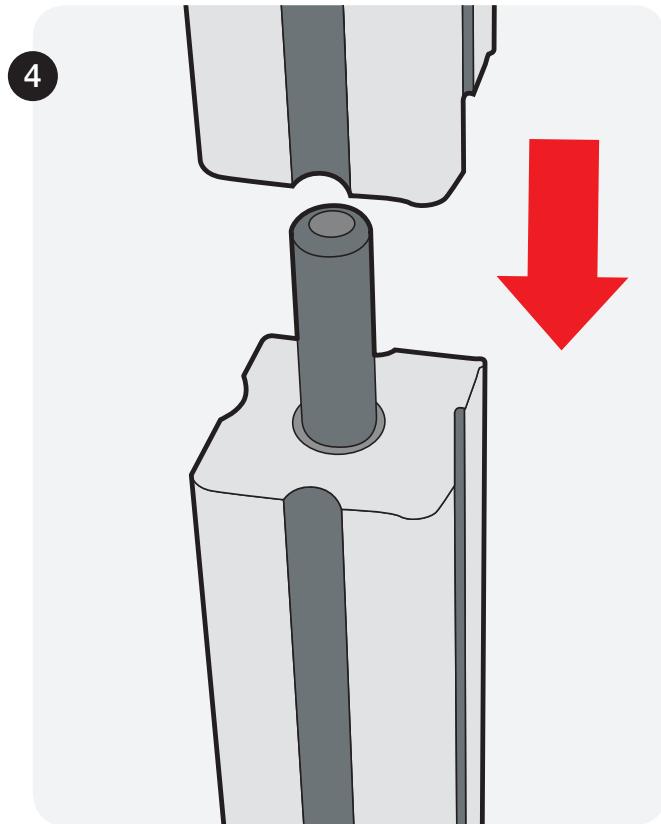


Place the next section of AV upright onto the locating pin and slide a locking pin between the joint and tighten.

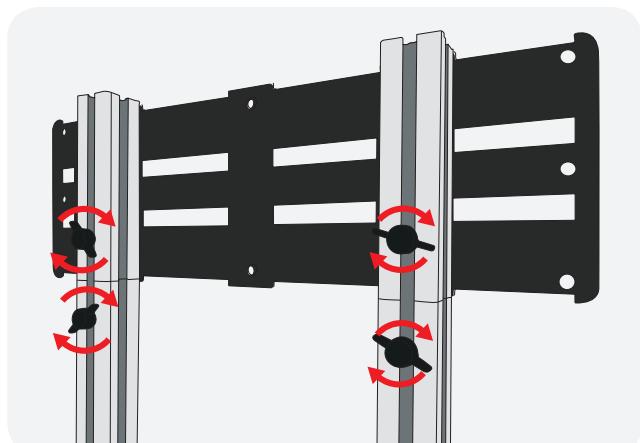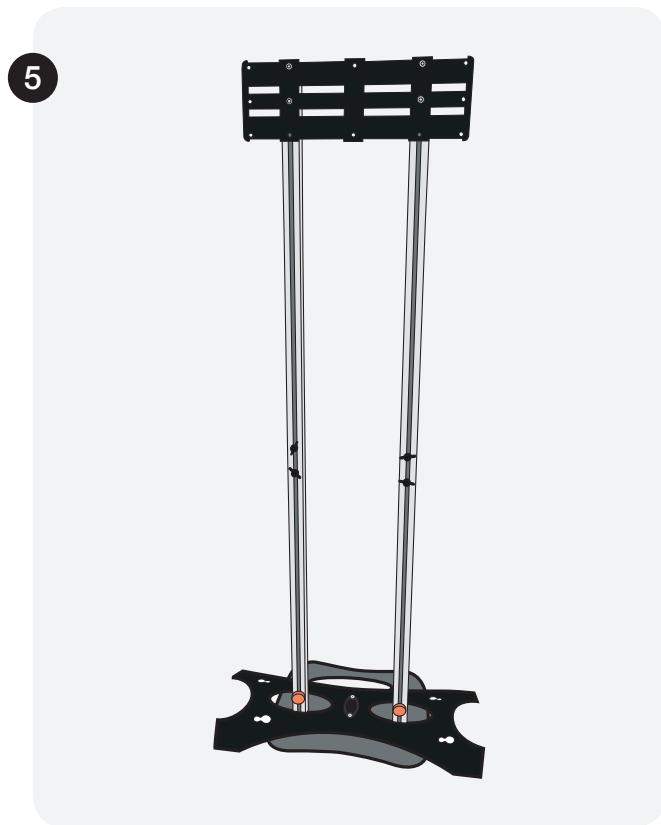


Locate the AV crossbeam into position and tighten the locking pins.


## Twist AV Stand Setup Instructions

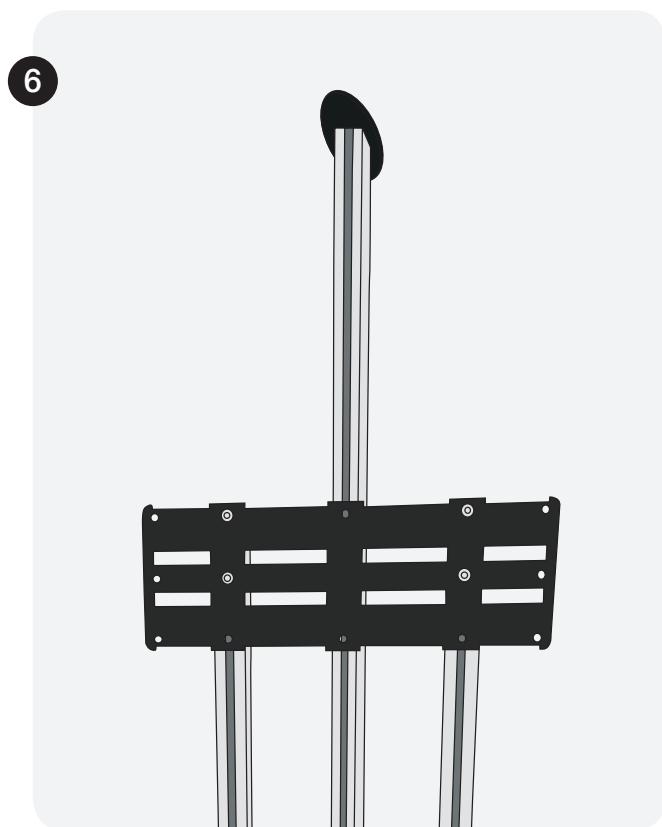

Continue to build the TWIST stand; making sure that the TWIST upright sits behind the AV crossbeam.

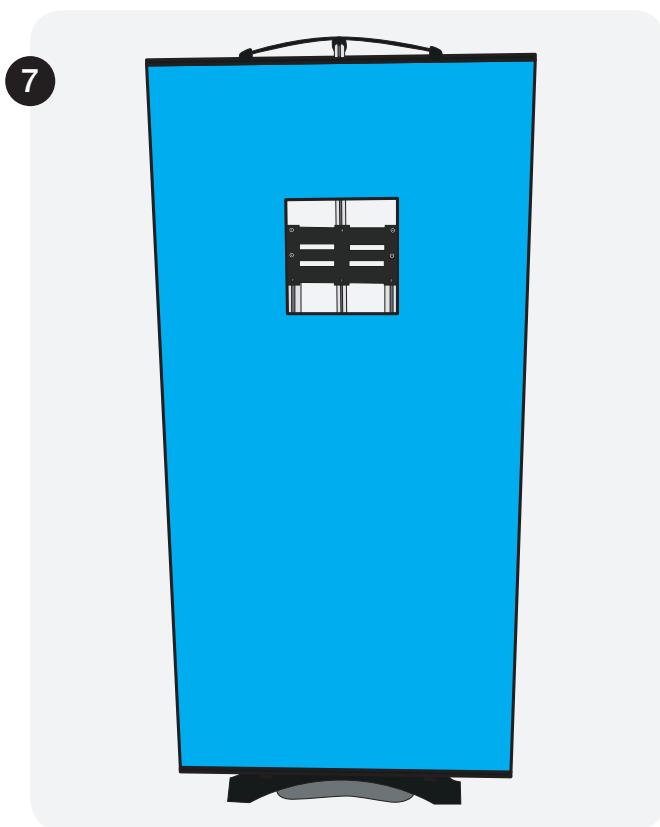

Then hang the graphic.

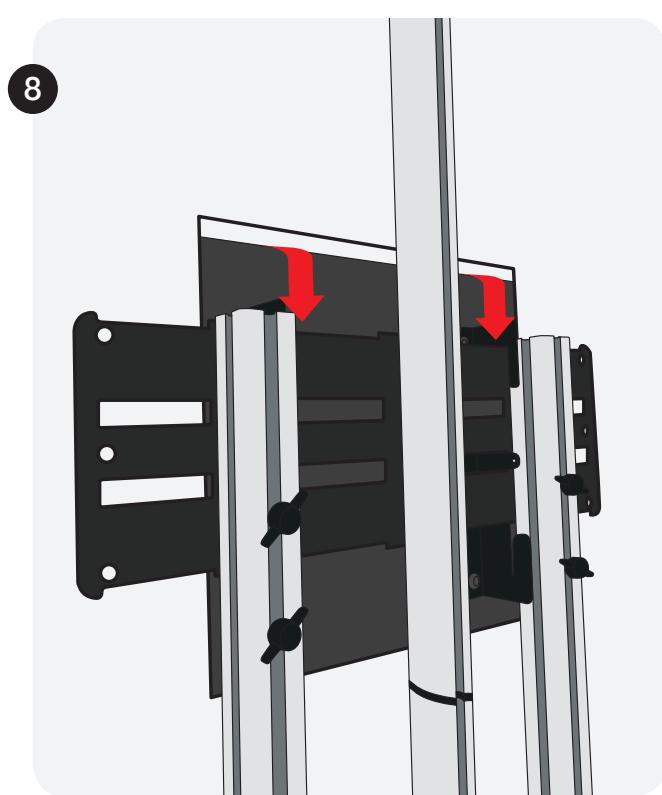


Once you have attached the brackets provided to the TV/Monitor screen, manoeuvre the screen into position so that the two brackets sit on top of the crossbeam. Once the screen is in position, further alterations can be made for cables if required.

 Please check the TV vesa mounting holes for compatibility.

Vesa mounting holes:      100mm x 100mm  
 200mm x 200mm  
 300mm x 100mm  
 400mm x 200mm  
 400mm x 100mm

## Twist AV Stand Setup Instructions

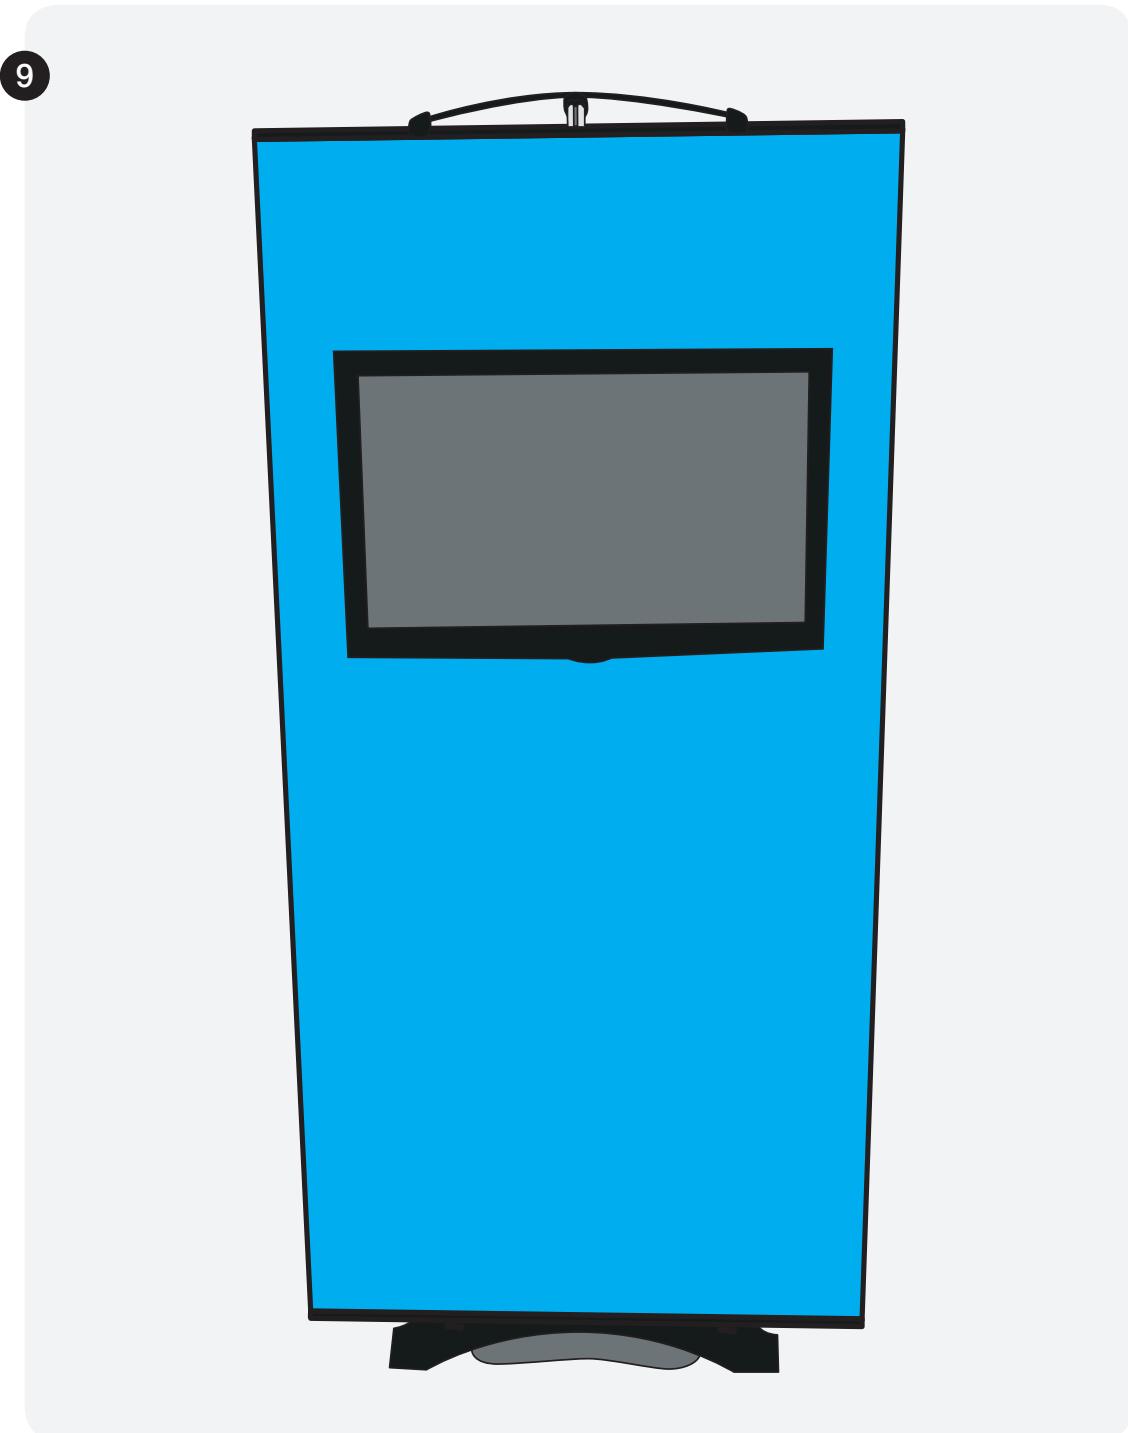

The AV stand complete.